




Premium Minireactors

High performance in a compact design

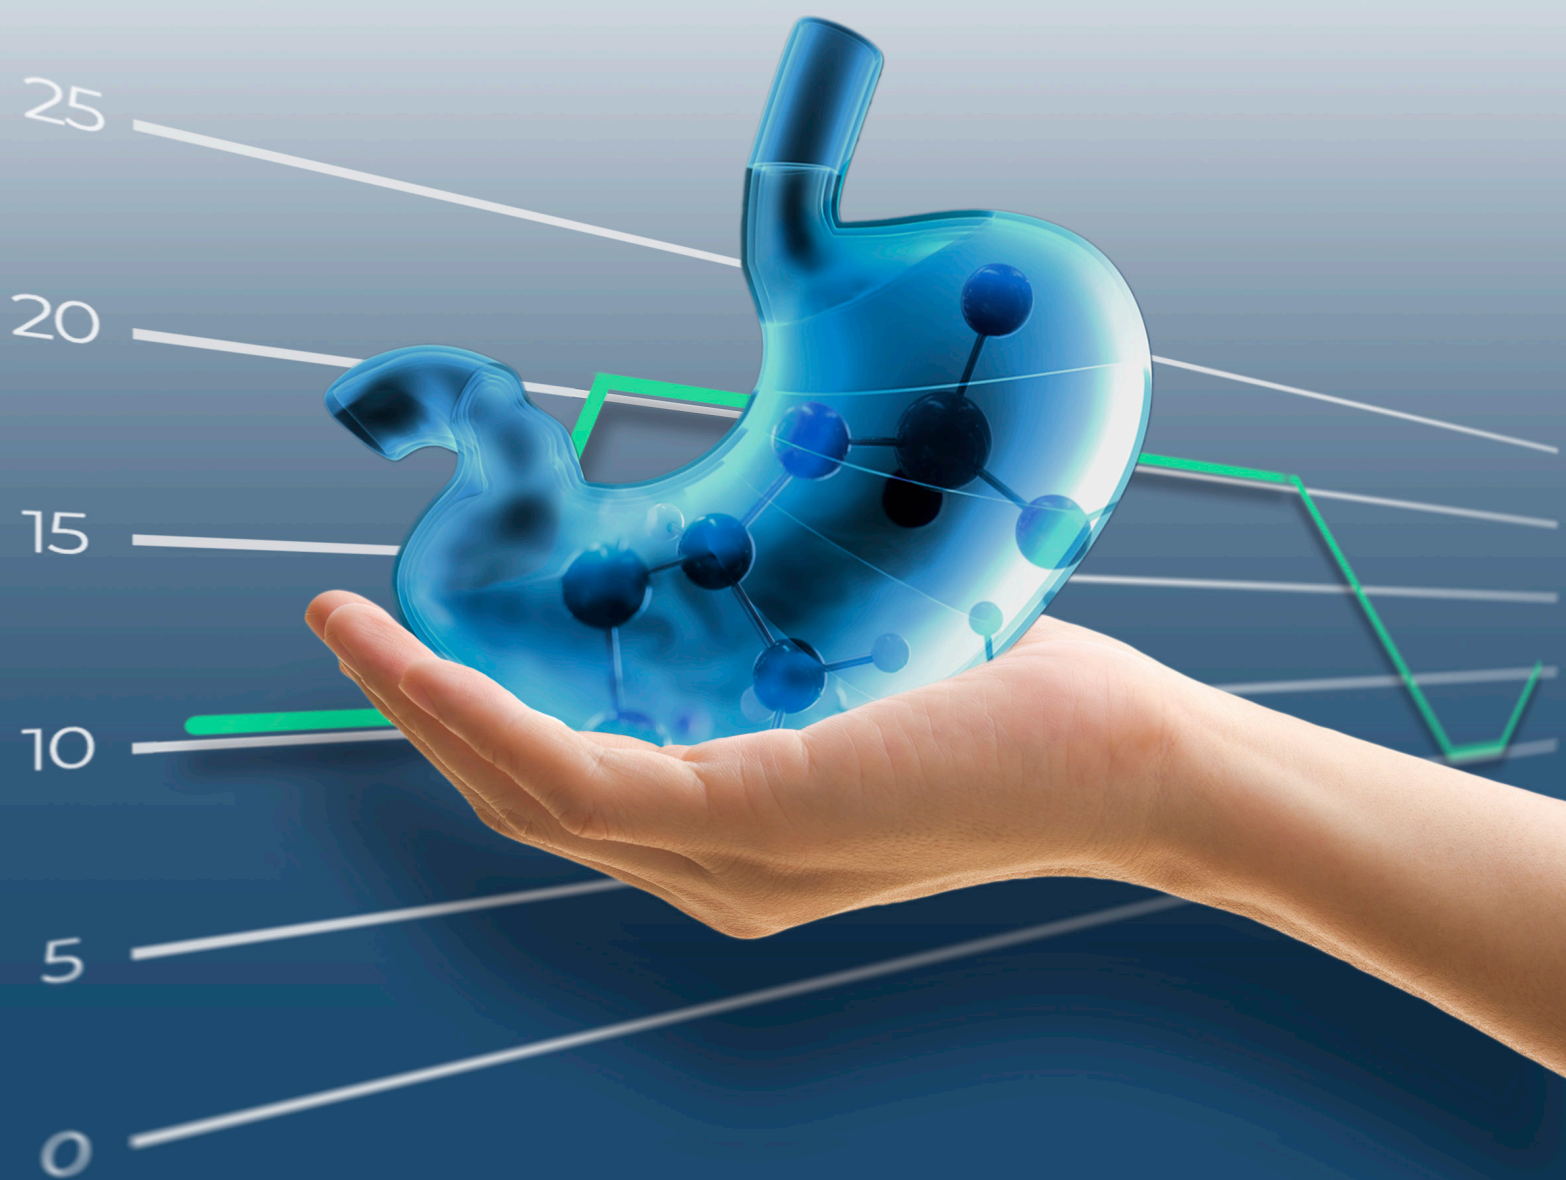

Compact Premium Minireactors for synthesis in liquid phase with mechanical stirring and electrical heating, ideal for applications in research and education



Premium HME-R Minireactor

- ▶ Aluminium block for fast and homogenous heating with groove for internal visibility
- ▶ Electrical heating from +15 to 250°C with PT100 sensor
- ▶ Reaction vessels from 50ml to 2 liters



- ▶ Easy internal access:
- ▶ Quick release tool-free vessel clamp made of stainless steel



- ▶ USB port for datalogging




- ▶ Colour touch screen
- ▶ Temperature ramps with up to 10 programs of 6 segment and graphics with real-time temperature and stirring curves (Premium HME-R model).
- ▶ Autotuning function.

Premium MR Minireactor

- ▶ Jacketed reaction vessels from 50ml to 2 liters
- ▶ Temperature control through external equipment (heating or cooling)
- ▶ Stirring speed and time settings
- ▶ Zero dead space drain PTFE stopcock
- ▶ Safety drip tray for accidental spills



- ▶ Mechanical stirring:
 - Stirrer bearing with quick motor coupling.
 - It maintains exact speed under changing loads or viscosity
- ▶ Heavy-duty stainless steel telescopic stand



- ▶ Standard 5 neck glass lid customizable on request
- ▶ FEP encapsulated silicone O-ring, grease free, with self-centering PTFE collar



- ▶ Inert and chemical resistant materials in contact with the reaction product (Glass, PTFE, Hastelloy® stirring shaft)



Technical specification

	PREMIUM HME-R MODEL	PREMIUM MR MODEL
Temperature range	Ambient +15 °C to 250 °C. (0.5 °C intervals) PT100 sensor	Depending on the circulating bath to which it is connected
Stirring speed range	100-700 rpm* controlled by microprocessor (25 rpm intervals)	
Programs	Up to 10 programs of 6 segments (Temperature, speed and time)	Up to 10 programs of 6 segments (Speed and time). Temperature: only register
Pressure range	From 5 mbar to 0.7 bar overpressure	
Display	Colour touch screen	
Graphics	Real-time temperature and stirring curves	
Materials	Glass, PTFE, Hastelloy®	
Alarm	Audible alarm	
Overheating protection	Automatic safety shutdown	-
Ports	USB port for datalogging	
Footprint dimensions	276 x 315 mm	
Minimum/Maximum height	635/935 mm (885/1150mm for 5 liters minireactor)	
Power	800W (hotplate) 50W (stirrer)	50W (stirrer)
Power supply	220V, 50-60 Hz	

* Available lower speed range on request (1-400rpm)

Order Information

Premium Minireactor HME-R with mechanical stirring and electrical heating

ART. NO.	CAPACITY	Ø JOINT	PACK (U.)
PHMER00/50	50ml	2.5"	1
PHMER0/100	100ml	2.5"	1
PHMER0/250	250ml	3"	1
PHMER/5003	500ml	3"	1
PHMER/5004	500ml	4"	1
PHMER/1000	1000ml	4"	1
PHMER/2000	2000ml	4"	1

Premium Minireactor MR with mechanical stirring and jacketed reaction vessel

ART. NO.	CAPACITY	Ø JOINT	PACK (U.)
PMR000/50	50ml	2.5"	1
PMR000/100	100ml	2.5"	1
PMR000/250	250ml	3"	1
PMR00/5003	500ml	3"	1
PMR00/5004	500ml	4"	1
PMR00/1000	1000ml	4"	1
PMR00/2000	2000ml	4"	1

www.scharlab.com

Scharlab S.L.

Gato Pérez, 33. Pol. Ind. Mas d'en Cisa.
08181 Sentmenat, Barcelona, Spain
Tel.: +34 93 715 19 40 - Fax: +34 93 715 27 65
E-mail: scharlab@scharlab.com

Scharlab Italia S.r.l.

Via Alcide De Gasperi 56.
20070 Riozzo Di Cerro al Lambro (Mi), Italy
Tel.: +39 02 9823 0679 / +39 02 9823 6266
Fax: +39 02 9823 0211 / +39 02 9811 9288
E-mail: customerservice@scharlab.it

Scharlab Magyarország Kft.

4034 Debrecen, Vágóhid. u. 2., Hungary
Tel: 0036(88)787-634 - Fax: 0036(88)781-081
E-mail: info@scharlab.hu

Scharlab Philippines, Inc.

18G Miller Compound, Barangay Bungad,
San Francisco Del Monte, Quezon City
1105 Philippines
Tel.: +63 2 3514972 - Fax: +63 2 3514972
E-mail: info@philippines@scharlab.ph

Scharlau Trading (Hangzhou) Company Ltd.

Room 508, Modern Star, 337# Shaoxing Road,
Hangzhou, Zhejiang, China
Tel: 0086-571-88536628
Fax: 0086-571-88536698
E-mail: china01@scharlab.com

