



Nitrile

Durable protection in a comfortable, versatile glove

- Versatile disposable glove ideal for a wide variety of industrial applications
- Textured throughout the palm to ensure good grip in wet, dry and oily environment
- Silicone-free for better product protection
- Tested for use with chemotherapy drugs



Industries

- Automotive
- Chemical
- Machinery and Equipment
- Life Sciences
- Food Processing

Recommended For

- Assembly and inspection of components
- Light assembly tasks
- Handling of paint/glue guns and sprayers
- Chemical Handling
- Cleaning of plant and machines
- Blending, compounding materials
- Equipment repair and maintenance
- Handling of tools
- Maintenance
- Laboratory analysis
- Transferring liquids and solids
- Sample taking and processing
- Food processing and handling



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-143
Material	Nitrile
Color	Blue
Glove Design	Chlorinated, Powder-Free, Silicone Free, Fully Textured
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 13485, ISO 9001
Regulatory	ASTM D6319, Category III, EAC TP TC 019:2011, EC 1935/2004, EC 2002/72, EC 2023/2006, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN 420:2003 + A1:2009, EN ISO 374-5:2016, FDA21 CFR 177-2600-US Food Contact Approved, ISO 13485, ISO 9001
Packaging	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	Multi-Purpose
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
Anti-static	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC)• Zinc Diethyldithiocarbamate (ZDEC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240 / 9.5		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 374-2
Palm Thickness (mm/mils)	0.11 / 4.3		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.12 / 4.7		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	22	14	ASTM D412 & D573
Elongation at Break (%)	500	400	ASTM D412
Force at break (N)	6	6	EN 455-2

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	93143060	93143070	93143080	93143090	931430100

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, [®] and [™] are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending.
www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.



Nitrile

Specially designed to protect while minimizing skin irritation

- Specialized formulation clinically proven to reduce chances of contact dermatitis
- Very low sulfur and aluminum content



Industries

- Life Sciences

Recommended For

- Assembly of parts
- Sample taking and processing



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-823
Material	Nitrile
Color	Blue
Glove Design	Chlorinated, Powder-Free, Silicone Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 13485:2003
Regulatory	ASTM D6319, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-5:2016, EN ISO 374-1:2016
Packaging	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	High Touch
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
Anti-static	No

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240 / 9.5		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 420
Palm Thickness (mm/mils)	0.06 / 2.4		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.10 / 3.9		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	29	20	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	93823060	93823070	93823080	93823090	93823100

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, [®] and [™] are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending.
www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.



Nitrile

Ergonomically designed to reduce hand fatigue

- Designed with ERGOFORM™ Technology to support musculoskeletal health and increase worker productivity
- Thin mil design for exceptional tactile sensitivity
- Strong formulation prevents against rips and tears
- Smartly packaged 250 gloves per box with clean, single glove dispensing to reduce waste
- Low 0.65 AQL for allowable pinholes means exceptional barrier integrity



Industries

- Automotive Aftermarket
- Food Processing
- Life Sciences
- Healthcare
- Machinery and Equipment
- Metal fabrication

Recommended For

- General Purpose Auto Aftermarket
- All food processing, applications that have food contact
- Assembly of parts
- Sample taking and processing
- Enhanced tactile sensitivity and dexterity, especially for delicate procedures
- Extra comfort during long, sustained procedures
- Protection from Type I latex allergy in HCW's or patients
- Standard patient examinations



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-833
Material	Nitrile
Color	Blue
Glove Design	Chlorinated, Powder-Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 13485, ISO 9001
Regulatory	Category III, EAC TP TC 019:2011, EC 2023/2006, EC 1935/2004, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-1:2016, EN ISO 374-5:2016, EN 421:2010, EN 455 1-4, ISO 13485, ISO 9001
Packaging	250 gloves per dispenser 10 dispensers per case 2500 gloves per case XL: 230 gloves per dispenser
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	High Touch
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
Anti-static	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC)• Zinc Diethyldithiocarbamate (ZDEC) <p>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240 / 9.5		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	0.65 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.07 / 2.8		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.11 / 4.3		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 26	≥ 22	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	93833060	93833070	93833080	93833090	93833100

Technology



Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia


Ansell PYC
Ten. +7 495 258 13 16



Nitrile

Extra-long disposable gloves with an elbow-length cuff for superior product and worker protection

- Elbow-length cuff (15.6 inches/395 mm) provides extra security against cross contamination
- Soft, durable nitrile material ensures excellent chemical splash protection with a comfortable feel
- Unique cuff design prevents roll-down
- Textured palm and fingers for confident, secure grip
- Packed in polybags for enhanced product protection

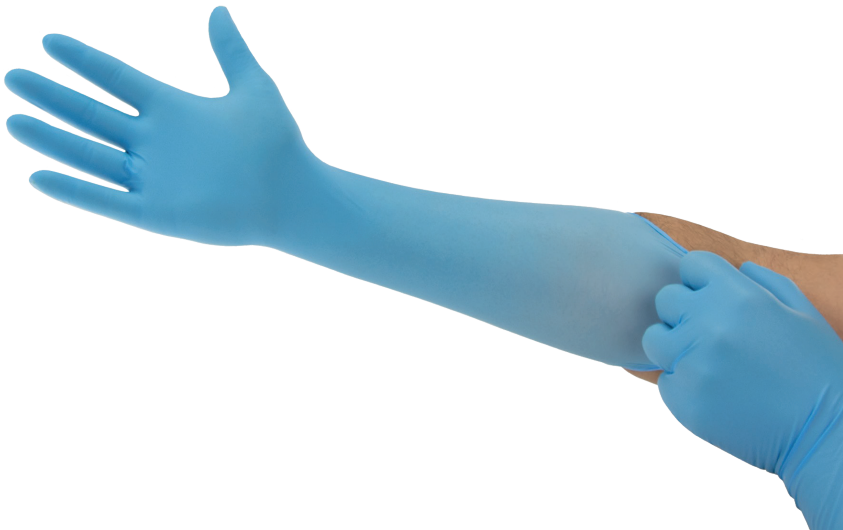

- Industries

 - Food Processing
 - Life Sciences
- Recommended For

 - Enhanced tactile sensitivity and dexterity, especially for delicate procedures



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-243
Material	Nitrile
Color	Blue
Glove Design	Chlorinated, Powder-Free, Silicone Free, Fully Textured
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory	Category III, EN ISO 374-1:2016, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-5:2016, Food Type: Rubber, ISO 9001
Packaging	100 gloves per polybag; 10 polybags per case; 1000 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	High Risk
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)
Anti-static	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC)• Zinc Diethyldithiocarbamate (ZDEC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	395 / 15.6		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.13 / 5.1		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.17 / 6.7		ASTM D3767,EN 420
	BEFORE AGING		AFTER AGING
Ultimate Tensile Strength (MPa)	≥14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	6	6	

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93243060	93243070	93243080	93243090	93243100	93243110

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region Ansell Healthcare Europe NV T: +32 (0) 2 528 74 00 F: +32 (0) 2 528 74 01	North America Region Ansell Healthcare Products LLC T: +1 800 800 0444 F: +1 800 800 0445	Australia Ansell Limited T: +61 1800 337 041 F: +61 1800 803 578
Asia Pacific Region Ansell Global Trading Center (Malaysia) Sdn Bhd T: +603 8310 6688 F: +603 8310 6699	Latin America & Caribbean Region Ansell Commercial Mexico S.A. de C.V. T: +52 442 248 1544 / 248 3133	Russia Ansell PYC Ten. +7 495 258 13 16

Ansell, [®] and [™] are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending. www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

Ergonomically designed with exceptional grip

- Designed with ERGOFORM™ Technology to support musculoskeletal health and increase worker productivity
- Certified for exceptional wet grip



Industries

- Life Sciences

Recommended For

- Plant disinfection and sanitization
- Maintaining lab furniture and equipment
- Transferring liquids and solids
- Transferring liquids
- Loading centrifuges and chromatography columns
- Assembly of parts
- Sample taking and processing
- Blending, compounding solids and liquids
- Raw material sample collection
- Damp donning



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	73-847
Material	Neoprene (Polychloroprene)
Color	Green
Glove Design	Polymer Coated, Powder-Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 13485:2003
Regulatory	ASTM D6977, Category III, EN 374:2003, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN ISO 374-5:2016, EN 421:2010
Packaging	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Indonesia
User Needs Segment	Multi-Purpose
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10)
Anti-static	No
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC) <p>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	245 / 9.6		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.10 / 3.9		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.13 / 5.1		ASTM D3767,EN 420
	BEFORE AGING		AFTER AGING
Ultimate Tensile Strength (MPa)	≥ 18	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	<6	<6	

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	73847060	73847070	73847080	73847090	73847100

Technology



Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center (Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending. www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.



Nitrile

Extended chemical splash protection, approved
for handling chemotherapy drugs

- Superior strength and durability for maximum protection against rips, snags or tears
- Low, 0.65 AQL for advanced barrier protection
- Tested for use with chemotherapy/cytotoxic drugs
- Tested against both fentanyl and gastric acid (vomit) to simulate hazardous, real world overdose situations



Industries

- Automotive
- Life Sciences
- Healthcare
- Chemical
- Machinery and Equipment

Recommended For

- Inspection, selecting, checking parts
- Assembly and inspection of components
- Picking and fastening components
- Equipment repair and maintenance
- General Purpose Auto Aftermarket
- Tire rotation & changes
- Animal care feeding and cleanup
- Maintaining lab furniture and equipment
- Sample taking and processing
- Administering drugs
- Raw material sample collection
- Tested for use with chemotherapy drugs
- Extra protection over the wrist and arm
- Protection from Type I latex allergy in HCW's or patients



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-853
Material	Nitrile
Color	Violet Blue
Glove Design	Chlorinated, Powder-Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 13485
Regulatory	Category III, EAC TP TC 019:2011, EN 1149-1/2/3, EN 374:2003, EN 455 1-4, EN ISO 21420:2020, EN ISO 374-1:2016, EN ISO 374-5:2016, ISO 1193, Medical Device Regulation (EU) 2017/745 Class I, Personal Protective Equipment Regulation (EU) 2016/425 Category III risks
Packaging	50 gloves per dispenser 10 dispensers per case 500 gloves per case *40 gloves per dispenser (Size XXXL) *400 gloves per case (Size XXXL)
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Malaysia
User Needs Segment	High Risk
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11), XXXL (11.5 - 12)
Anti-static	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	295 / 11.6		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	0.65 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.14 / 5.5		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.22 / 8.7		ASTM D3767,EN 420
	BEFORE AGING		AFTER AGING
Ultimate Tensile Strength (MPa)	≥ 30	≥ 20	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 18	≥ 18	EN 455-2

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)	XXXL (11.5 - 12)
Product Code	93853060	93853070	93853080	93853090	93853100	93853110	93853120

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01


Asia Pacific Region
Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region
Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia
Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia
Ansell PYC
Ten. +7 495 258 13 16



Chemical-resistant disposable gloves that offer tough chemical protection and unparalleled comfort.

- Three layer design for superior protection against harsh chemicals
- The thinnest chemical resistant disposable glove for enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility
- Lower acceptable pinhole rate (0.65 AQL) for reliable protection against hazardous substances
- Tested against both fentanyl and gastric acid (vomit) to simulate hazardous, real world overdose situations



Industries

- Aerospace
- Automotive
- Automotive Aftermarket
- Life Sciences
- Chemical
- Agriculture
- Emergency Medical Services
- Food Processing
- Machinery and Equipment
- Metal fabrication
- Utilities
- Warehousing

Recommended For

- Inspection, selecting, checking parts
- Assembly and inspection of components
- Equipment repair and maintenance
- Production line support and maintenance
- General Purpose Auto Aftermarket
- Oil, fluids and filter change
- Blending, compounding solids and liquids
- Sample taking and processing
- Transferring liquids and solids between vessels and tanks and process equipment



TECHNICAL DATA SHEET

PRODUCT INFORMATION

	93-260
Material	Nitrile + Neoprene (Polychloroprene)
Color	Green
Glove Design	Chlorinated, Powder-Free, Silicone Free, Textured Fingers
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory	Category III, EAC TP TC 019:2011, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN ISO 374-5:2016, EN 374:2003, EN 388:2003, EN 388:2016, EN 421:2010, FDA21 CFR 177-2600-US Food Contact Approved, ISO 9001
Packaging	Bulk Pack: 50 gloves per dispenser; 10 dispensers/500 gloves per case Retail Pack: 6 gloves per pack
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Sri Lanka
User Needs Segment	High Risk
Available sizes	XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)
Anti-static	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none">• Zinc Dibutyldithiocarbamate (ZDBC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	≥ 285 / 11.2		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	0.65 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.198 / 7.9		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.20 / 7.9		ASTM D3767,EN 420
	BEFORE AGING		AFTER AGING
Ultimate Tensile Strength (MPa)	≥ 22	≥ 26	ASTM D412 & D573
Elongation at Break (%)	≥ 620	≥ 520	ASTM D412
Force at break (N)	≥ 16	≥ 17	EN 455-2

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93260060	93260070	93260080	93260090	93260100	93260110
Retail Pack Catalog №			93260RP080	93260RP090	93260RP100	

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center
(Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, [®] and [™] are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending.
www.ansell.com/patentmarking © 2022 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.